


# 射频同轴转接器/ RF Coaxial Adapter

## XQY-MMCX-JJTD

项目 Project	指标 Indicators
产品名称 Product Name	射频转接器/RF Adaptor
频率范围 Frequency Range	DC-6GHz
驻波比 VSWR	1.20:1 (max)
阻抗 Impedance	50 $\Omega$
插入损耗 Insertion Loss	0.20dB (max)
介质耐电压 Dielectric withstand voltage	1000 V
使用寿命 Service life	$\geq 500$
绝缘电阻 Insulation Resistance	$\geq 5000M\Omega$
A 接头类型 A connector type	MMCX-Male
B 接头类型 B connector type	MMCX-Male
工作温度 Operation Temperature	-55 $^{\circ}$ C ~ +165 $^{\circ}$ C
内导体材质 Inner conductor material	黄铜 镀金 Brass Gold Plated
外导体材质 External conductor material	黄铜 镀金 Brass Gold Plated
绝缘体 Insulator	PTFE

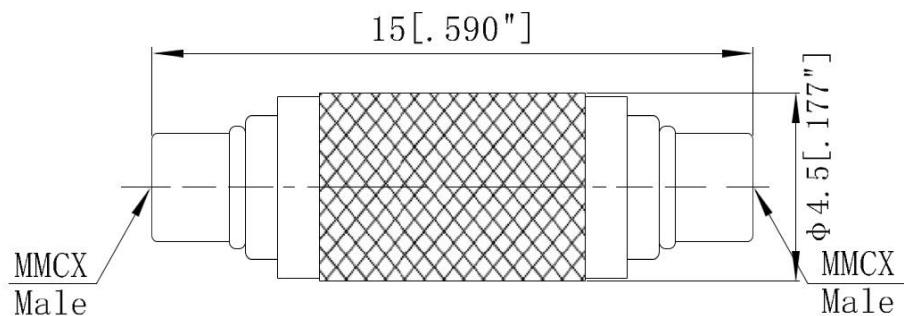

注: 尺寸(mm/[英寸]) , 一般公差( $\pm 0.05$ )

Note: Dimensions (mm / [inch]), General tolerance ( $\pm 0.05$ )