

4

3

2

1

THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION
---------------------------	-------------------------

LOC	DIST	REVISIONS					
---	---	P	LTR		DATE	DWN	APVD
			---	---	---	---	---

D

D


41.6 [1.638"]

C

C

NOTES:

- 1.ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:5000M Ω
 - 1.3 FREQUENCY RANGE: DC-18 GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE 1000V MAX AT SEA LEVEL
 - 1.5 VSWR: ≤1.20:1 (MAX)
 - 1.6 INSERTION LOSS: 0.18 dB (MAX)
- 2.ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
 - 3.1 INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
 - 3.2 EXTERNAL CONDUCTOR MATERIAL: BRASS PLATING TERNARY ALLOY
 - 3.3 LNSULATOR: PEI

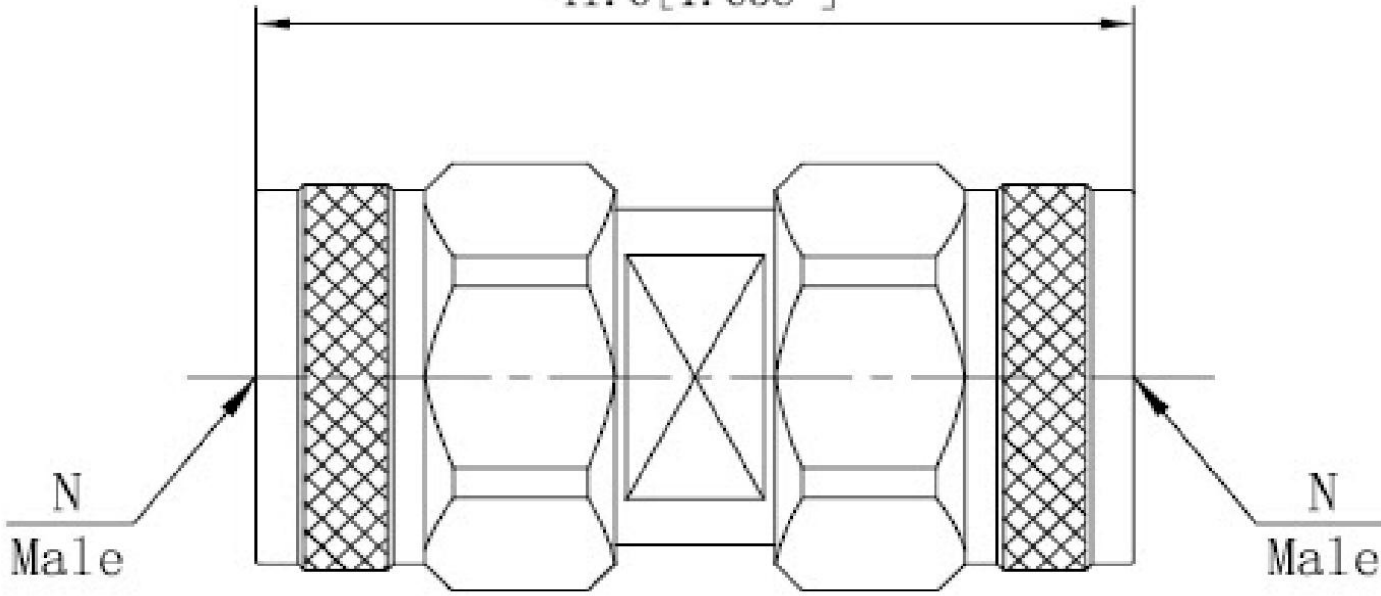



B

B

A

A

- 2.ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
 - 3.1 INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
 - 3.2 EXTERNAL CONDUCTOR MATERIAL: BRASS PLATING TERNARY ALLOY
 - 3.3 LNSULATOR: PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.			
		CHK				
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME			
		0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 ANGLES ±1°	APVD		N Male TO N Male RF Coaxial Adapter	
			APPLICATION SPEC	DRAWING NO		
MATERIAL SEE TABLE		FINISH SEE TABLE	---	SIZE A4	CAGE CODE 01021	XQY-N-JJSD
			WEIGHT	CUSTOMER DRAWNG		SCALE 2:1
			---	SHEET 1	OF 1	RVE 1

4

3

2

1