

4

3

2

1

THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBUCATION

LOC

DIST

REVISIONS

P

LTR

DATE


DWN

APVD

D

D

34 [1.338"]

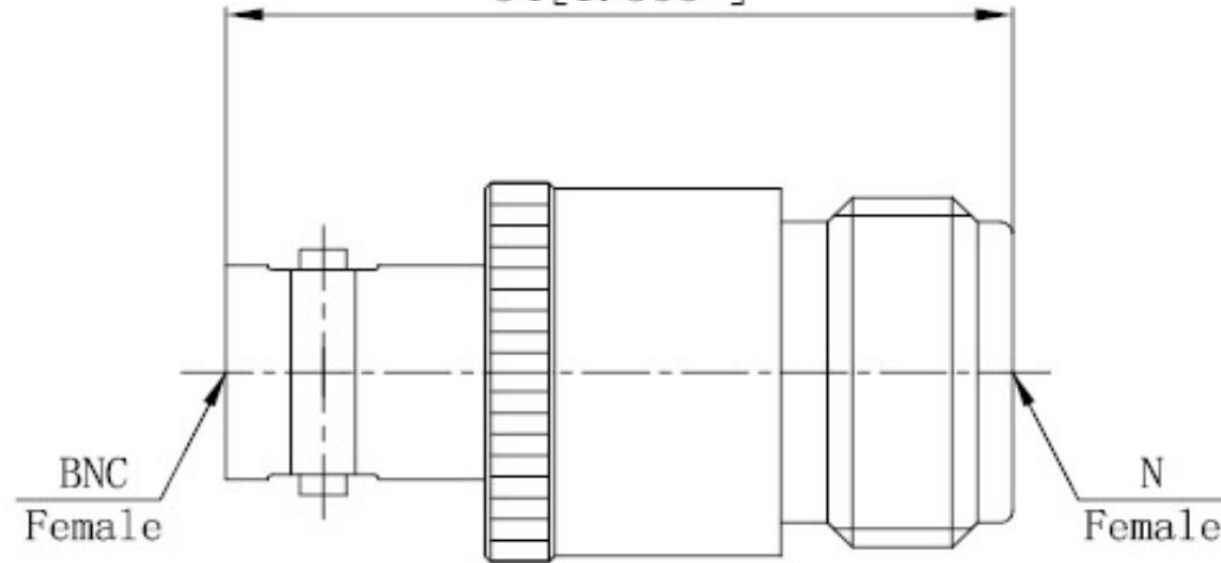

C

C

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000M Ω
- 1.3 FREQUENCY RANGE: DC-4GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:
1000V MAX AT SEA LEVEL
- 1.5 VSWR:≤1.15:1 (MAX)
- 1.6 INSERTION LOSS: 0.20dB (MAX)

B

B

2.ENVIRONMENTAL:



- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 INNER CONDUCTOR MATERIAL:
BERYLLIUM BRONZE GOLD PLATING
- 3.2 EXTERNAL CONDUCTOR MATERIAL:
BRASS PLATED TERNARY ALLOY
- 3.3 LNSULATOR: PEI

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.			
		CHK				
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD			
		0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 ANGLES ±1°	APPLICATION SPEC			

MATERIAL SEE TABLE		FINISH SEE TABLE	SIZE A4		CAGE CODE 01021	DRAWING NO N/BNC-KKSD
CUSTOMER DRAWNG			SCALE 2:1	SHEET 1	OF 1	RVE 1

4

3

2

1